

# KT-0700 Ice Kube Machine

#### **Models**





### Ice Machine Electric

208-230V / 60Hz /1 Ph

#### Minimum circuit ampacity:

Air-cooled: Water-cooled: 8.2 Maximum fuse size: Air Cooled: 15 Amps Water cooled: 15 Amps

## **Specifications** Operating Limits:

#### **BTU Per Hour:**

12,500 (average) and 13,700 (peak)

#### Refrigerant:

R410A CFC - Free Lowers global warming by 48%

- Ambient Temperature Range: 40° to 110°F (4.4° to 43.3°C) Water Temperature Range: 40° to 90°F (4.4° to 32.2°C)
- · Water Pressure Ice Maker Water In:

Min. 20 psi (137.9 kPA) Max. 80 psi (551.1 kPA) Koolaire by Manitowoc ice machines are designed, developed and tested by Manitowoc engineers to provide great ice production, energy efficiency and reliable service at an affordable price.

#### Performance/Features/Benefits

- Produces up to 740 lbs (336 kg) of ice per day\*\*
- Performance certified by the Air Conditioning, Heating and Refrigeration Institute (ÁHRI)
- Energy Efficient models visit EnergyStar.gov to view all Energy Star qualifying models
- · Highly efficient electro-less nickel plated copper evaporators made in Manitowoc WI, USA
- Simple operation only one control, three positions ON/OFF/
- High-Tech exterior with smudge and fingerprint resistant stainless-like finish
- Better for the environment. Uses R410A refrigerant which lowers global warming potential by 48%
- Backed by the industry's best Manitowoc distribution network and service agents

#### **Built for Easy Sanitation**

- Easy access front facing evaporator
- · One-touch remedial cleaning; requires minimal interaction; just add chemical and let the machine do the rest. No ice removal from bin needed. (Use Manitowoc De-scaler and
- For detail cleaning; all food zone components removable by hand (no tools required). Fast and easy
- All white plastic interior, no exposed tubes or wires, smooth rounded corners for fast easy wipe downs
- The food zone is sealed from above and on the back of the door panel with commercial grade rubber gaskets
- Alpha San anti-microbial agent molded in selected components
- Additional sanitation protection available with CleanAir™ packs to control the growth of bacteria, fungi and slime inside the food zone
- \*\*based on 70F air / 50F water

### **Ice Shape**



HALF KUBE ¾" x 1½" x ½" (.95 x 2.86 x 2. 22 cm)

<u>\*</u> = 100%



7/8" x 7/8" x 7/8" (2.22 x 2.22 x 2.22 cm)

<u>\*\*</u> = 100%



















Tel: 1.920.682.0161 Fax: 1.920.683.7589





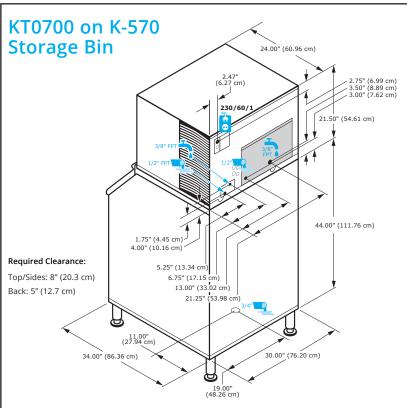

Water cooled condenser water usage/100 lbs. or 45.5 Kg. of ice: 160 gals. / 606L.

### **Space-Saving Design**



K-570

Height 71.50" 181.61 cm

Width 30.00" 76.2 cm

Depth 34.00" 86.30 cm

Bin 532 lbs.

Storage 241 kgs.

Measurements with bin legs at 6.00" (15.24cm). Adjustable bin legs 6.00" to 8.00" (15.24cm to 20.32cm). Bin capacity is based on 90% of the volume x 33 lbs/ft 3 average density of ice.

### **Specifications**

			Ice Production 24 Hours		Power Usage kWh/100 lbs. @90°Air/70°F	Potable Water
	Model	lce Shape	70°/ 50°F 21°/ 10°C	90°/ 70°F 32°/ 21°C	1 Ph	Usage/100 lbs. 45.4 kgs. of Ice
AIR COOLED	KDT-0700A	kube	675 lbs.	530 lbs.	5.35	19 Gal.
			306 kgs	240 kgs		71.9 L
	KYT-0700A	half-kube	740 lbs.	580 lbs.	5.12 ★	19 Gal.
			336 kgs	263 kgs		71.9 L
WATER	KDT-0700W	kube (iiii)	660 lbs.	550 lbs.	4.45	19 Gal.
			299 kgs	249 kgs		71.9 L
	KYT-0700W	half-kube	705 lbs.	580 lbs.	4.20	19 Gal.
			320 kgs.	263 kgs		71.9 L

Order ice machine and bin separately ★ indicates Energy Star 3.0 certified

### **Shipping Weight:**

Air-cooled: 170 lbs (77 kg) Water-cooled: 172 lbs (78 kg)



#### **Accessories**

Dispenser Bin Thermostat Kit Reduces condensation when used with dispensers.



**Top Air Discharge Kit**Convert air flow to rear in-take / top exhaust.



Arctic Pure® Water Filters Reduces sediment and chlorine odors for better tasting ice.



Clean Air Pack Chlorine dioxide sachet to inhibit bacteria growth.



Welbilt reserves the right to make changes to the design or specifications without prior notice.

2110 South 26th Street Manitowoc, WI 54220 Tel: 1.920.682.0161 Fax: 1.920.683.7589 www.kool-aire.com 5204F 04/20

