



FAST-TRAK® WALK-INS



FEATURES

- Available in widths of: 6', 7' & 8'
- Unlimited lengths in 1' increments
- Heights: 7'7" & 8'7" with floor, 7'4" & 8'4" floorless
- Coolers, freezers or combination cooler/freezers
- Exterior finish is corrosion resistant stucco embossed coated steel
- Full 4" panel foamed-in-place with HFC free HFO polyurethane insulation
- Indoor or outdoor models
- Fast and easy installation
- 30" or 36" self-closing door
- Digital thermometer and light switch
- NL2400 adjustable spring loaded hinge
- Spring actuated door closer
- Deadbolt locking handle for security
- Pre-assembled remote refrigeration systems
- Temperatures: +38°F, +35°F, -10°F
- 15 year panel warranty - Industry leading
- Approvals:
 - NSF listed
 - UL flame spread of 25 or less
 - ULC listed flame spread
 - UL and CSA electrical listing on door sections
 - City of Houston listed
 - California State listed
 - Oregon State listed
 - USDA accepted

800-955-5253 | norlake.com

OPTIONS

- 9', 10', 11' & 12' width*
- Aluminum diamond tread or stainless steel interior and exterior kickplates
- With floor/less floor combination*
- Exterior ramp (with floor models)
- Interior ramp*
- Non-skid strips (shipped loose)
- Extra vapor-proof lights (shipped loose)
- LED Lighting
- Outdoor membrane roof systems
- Viewport
- Strip curtains (shipped loose)
- Door rain hoods
- Indoor remote refrigeration system
- Specially designed shelving kits
 - Flexible shelf adjustment in 1" increments
 - Shelving layouts utilize maximum space for storage leaving the door opening clear of end standards
 - Green Kote™ special epoxy-coated finish provides extra protection from acidic foods
 - Quick and easy assembly
 - Rigid construction
 - Stronger shelves
 - Optional U-shaped systems

*Consult factory for lead time on this option.

REFRIGERATION SYSTEM OPTIONS

Capsule Pak™ self-contained systems consist of a condensing unit and evaporator coil contained in a single housing for indoor and outdoor models.

Indoor model




Outdoor model



Capsule Pak units are easily installed with standard cord and plug electrical connection.

Split-Pak™ remote models feature the most efficient condensing unit and evaporator coil combinations

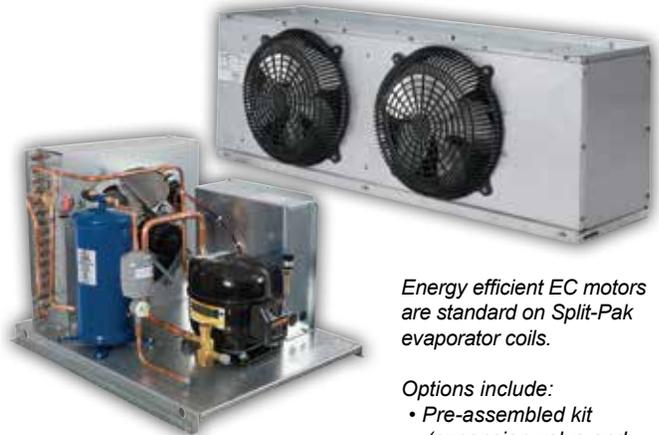

Energy efficient EC motors are standard on Split-Pak evaporator coils.

Options include:

- Pre-assembled kit (expansion valve and properly-sized orifice factory pre-mounted)
- Factory-installed liquid line solenoid/temp control kit (pre-assembled kit required)

Split-Pak condensing units are standard with generously-sized condensers for maximum performance in harsh environments. Each unit is pre-piped and pre-wired at the factory for convenient installation.

Dedicated medium temp condensing units meet the DOE requirement of a minimum AWEF rating of 5.61 (Btu/W-h) for indoor models and 7.6 for outdoor models.



891 County Road U | Hudson, WI 54016
800-955-5253 | 715-386-6149 FAX
www.norlake.com



Revision Date: 2/21
Part Number: 101625